

Installation Guide



LCC-10

Lighting Connection Centre



Cooper Lighting Solutions

Usk House, Lakeside
Llantarnam Park,
Cwmbran,
NP44 3HD, UK

t: +44 (0)1923 495495

e: info@cooperlightingsolutions.co.uk


www.cooperlightingsolutions.co.uk

EU Authorised Representative


Cooper Lighting Netherlands B.V.
High Tech Campus
HTC 48
Eindhoven
5656 AE

E&OE. iLight reserve the
right to make changes to the
equipment without prior notice.
© Cooper Lighting Solutions

Doc No: 9850-000831-01



Typical Schematic

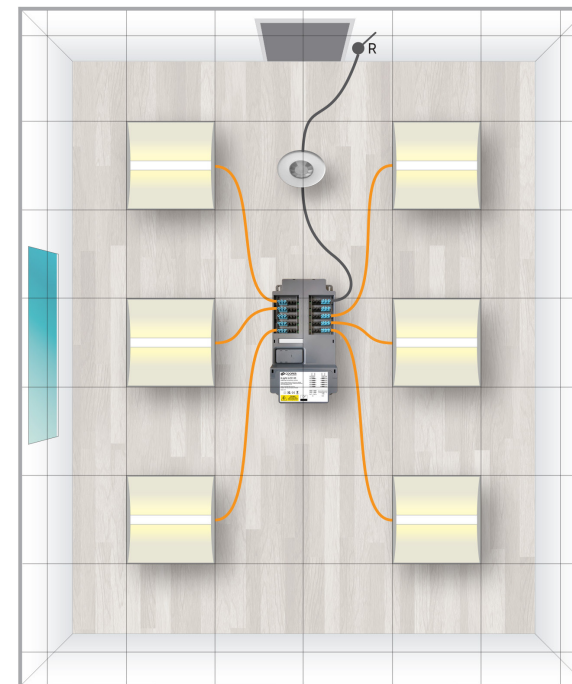


Mounting & Installation

LCC-10 must be securely mounted to a suitable surface using the 4 mounting holes provided with fixings suitable for the substrate (Maximum fixing diameter 6mm). The LCC-10 can be mounted in any orientation to cable trays, walls and direct to a ceiling slab. All cables should be independently secured with appropriate fixing straps in accordance with local electrical regulations. Incoming mains, data and input cables should be installed using suitable compression cable glands to provide strain relief.

Mounting Hole

Mounting Hole

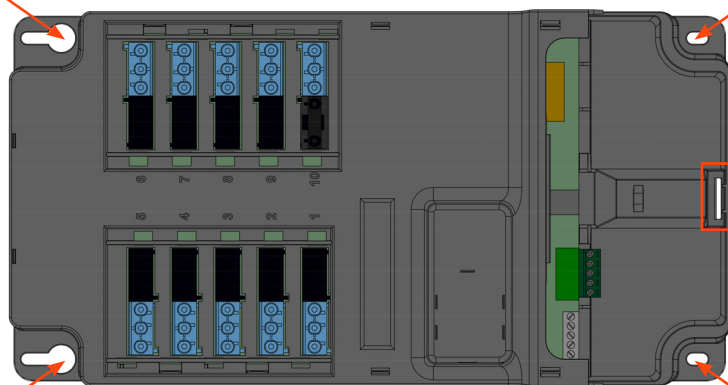

Once securely mounted,
remove cover using a
flat-head screwdriver to
access the wiring screw
terminals. Gently tilt the
screwdriver towards the
top (connectors) of the
LCC-10 to release.


Mounting Hole

Mounting Hole

Removing Knockouts

The knockouts can be removed with a flat-head screwdriver in 2 simple steps:

1. Place the flat-head screwdriver into the slot of the knockout that is to be removed. The screwdriver must be placed in the slot nearest to the bottom of the enclosure (opposite the cover).
2. Hit the end of the screwdriver to shear the knockout and remove the rest of the knockout by hand if necessary.

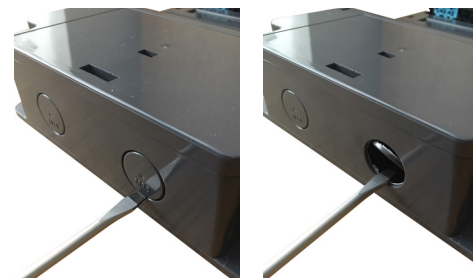

Alternatively an appropriate sized hole saw can be used utilising the drill bit location point at the centre of each knockout.

Technical Data

Electrical Data

Supply: 230 volts \pm 10%, 50/60 Hz
Terminals max. wire size: 4mm² loop in/out
Maximum DALI cable length: 300m per LCM
Minimum DALI cable conductor diameter: 1.5mm²
Protection: Provided by installer - Use supply MCB, 16A or less

Mechanical Data

Dimensions: 200.2mm (w) x 382.8mm (h) x 57.5mm (d)
Maximum diameter of fixings: 6mm
Weight: 2.5 kg

Operating Conditions

Operating temperature: +2°C to +50°C
Max storage temperature: +60°C
Humidity: +5 to 95% non-condensing
Environmental protection: IP20

Typical Connection Diagram

Incoming Supply
230 volts +/- 10%, 50/60 Hz
Mains supply protection:
Provided by installer (16A Max)



IMPORTANT NOTE: If the external luminaire requires a protective earth for safety purposes then a protective earth must be installed during the installation process by a qualified installation engineer/ electrician to the local/national regulations. LCMD-10 does not provide a protective earth.

