

CLASSIC

Classic Control Plate Range

Key Features

- Designed to match Wandsworth Series 3 metal Panels with 9 finishes available
- Up to 10 buttons per panel (single gang) or 20 buttons (double gang)
- Buttons have integral indication of active button
- Blue LED indication on each button
- All button functions are programmable - includes 8 sequences
- Engraving options on buttons or plate
- Optional hidden RJ12 programming socket in place of button 10
- Keyswitch option
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Configurable start up mode
- CE & UKCA compliant to all relevant standards
- Designed and manufactured to ISO9001 standard



Overview

These control plates provide the interface between the user and the remote dimmer. Installed in standard single or double gang UK style electrical wallboxes and connected to the dimmer by LV cable, these versatile units can be installed in any chosen position to suit the layout.

Control Plates perform a number of tasks. Their buttons allow users to select lighting scenes, raise or lower levels, or select any other programmed system function. If the Program function is set, they allow lighting scenes to be programmed locally, and their RJ12 socket, when connected to a PC running Device Editor, allows full remote access to the whole iLight network. It is possible to have more than one control plate in an area. When used in this way the indicators in the buttons will show which function is selected in the area irrespective of which control plate activated it.

Button Functions

- Scene selection
- Scene raise/lower
- Channel raise/lower
- Toggle on/off
- Toggle raise/lower
- True off
- Open/close (for curtains or blinds)
- Raise/lower (for motorized screens)
- Task (start/stop a sequence)


Mechanical Data

- Control Cable Access: via standard 35mm deep UK wallbox – not provided
- Temperature: +2°C to +40°C
- Humidity: +5 to 95% non condensing
- Control Inputs: One set of terminals for the iLight iCANnet™ network
- Suitable for iCANnet Network Cable

Electrical Data

- Supply: +12V (via iCANnet™ cable)
- Terminal Sizes:
- iLight network cable size: 5 x 1mm²
- Memory:
- FLASH memory to be able to upgrade firmware
- EEPROM for program and sequence memory


Plate Finish Codes

-  PB Polished Brass
-  AB Antique Bronze
-  SS Satin Stainless Steel
-  MS Super Mirror Stainless
-  AR Antique Brass
-  AC Antique Copper
-  AS Antique Silver
-  MB Matt Black
-  W White


Double Gang Examples




Dimensions

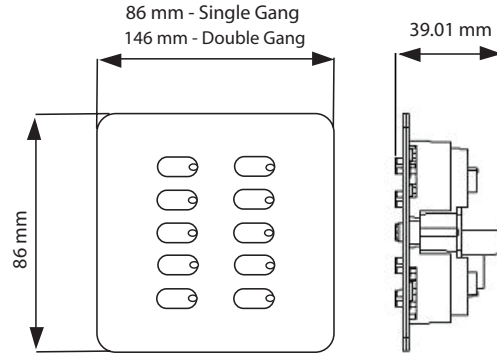

Ordering Codes

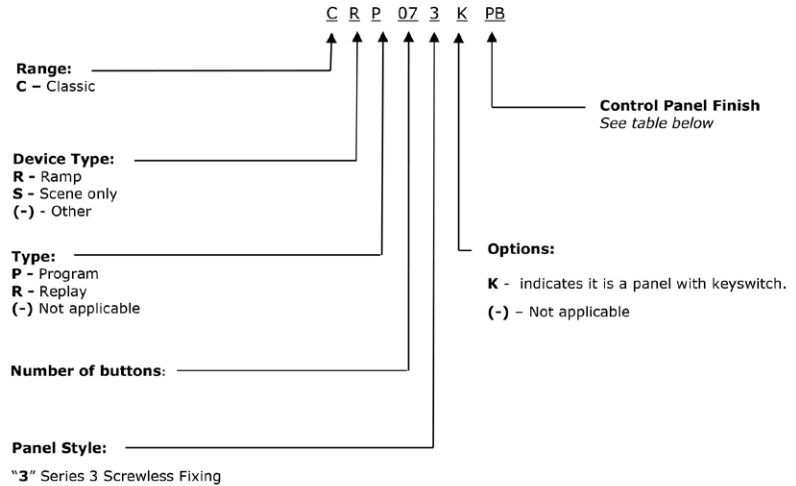

Typical Schematic

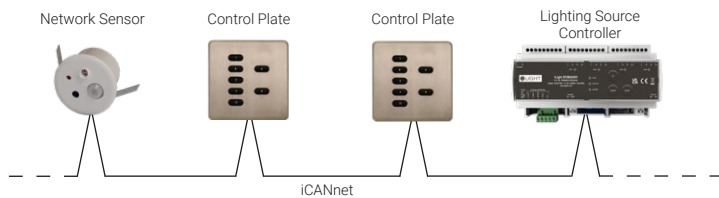

Contact Us

enquiries@iLight.co.uk

www.iLight.co.uk

iLight
A brand of Signify
Usk House, Llantarnam Park
Cwmbran, NP44 3HD, UK

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

© 2024 Signify Holding
All Rights Reserved

iLight is a registered trademark.
All other trademarks are property of their respective owners.

CLASSIC Rev16 0524



FM 727924

