



# iCANnet Cable

## For the installation of iLight Control Systems

### Specification

#### Power

- Conductor: 18 AWG, tinned copper
- Insulation: Polyethylene
- Colour code: Red & black

#### Data

- Conductor: 22 AWG, tinned copper
- Insulation: Polyethylene
- Screen: Aluminium foil
- Drain wire: Tinned copper
- Colour code: White & blue

#### Overall


- Jacket: Low smoke halogen free
- Colour: Blue
- Overall diameter: 6.35mm (nominal)
- Cable drum size: 300m
- Drum weight: 19.5Kg

#### Technical

- DC resistance conductor 22AWG:  $\leq 54.20 \Omega/\text{km}$  @ 20°C
- DC resistance conductor 18AWG:  $\leq 23.70 \Omega/\text{km}$  @ 20°C
- Operating Voltage: 300V
- Capacitance Core to Core 22AWG: 46pF/m
- Capacitance Core to Core 18AWG: 95pF/m
- Inductance Core 22AWG: 0.76 $\mu\text{H}/\text{m}$
- Inductance Core 18AWG: 0.55 $\mu\text{H}/\text{m}$

### Overview

iCANnet Network Cable is specifically designed to connect between each device on an iLight control system. The cable consists of 2 x 18 AWG tinned copper wire with PE Insulation (Power pair) and 2 x 22 AWG screened tinned copper wire with PE Insulation (data pair). There is also a tinned copper drain wire in contact with the aluminium foil screen. The cable is sheathed overall in LSZH.

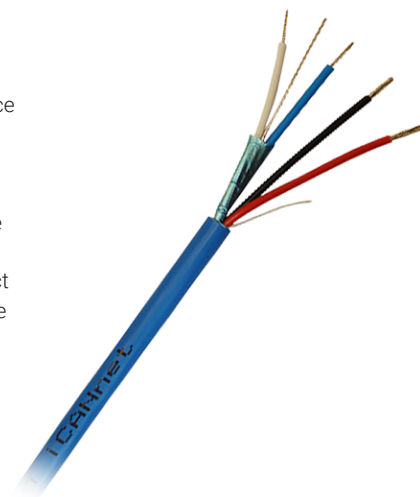

Function	Network Cable Colours
0V	Black
CAN L	Blue
Shield	Silver
CAN H	White
+VDC	Red

### Contact Us

+44 (0)1923 495495

enquiries@iLight.co.uk

www.iLight.co.uk

**Cooper Lighting Solutions**  
20 Greenhill Crescent,  
Watford Business Park,  
Watford, Herts, WD18 8JA. UK

© 2020 Cooper Lighting Solutions  
All Rights Reserved

iCANnet Cable Rev4 1020

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

iLight is a registered trademark.

All other trademarks are property of their respective owners.

