

# Verre Series

## Capacitive Control Plate - Guest Room

### Key Features

- Capacitive glass guest room entrance and doorbell plates
- Part of the Verre Series of user interfaces
- High quality 4mm glass front fascia
- Proximity sensor for welcoming an approaching user
- Two part construction, simplifying installation process
- Intuitive touch sensitive control with optional audible feedback
- Available in black, grey and white as standard
- Configure to order options include a comprehensive library of button icons
- Configurable start up mode
- All button functions are fully programmable for single or more complex actions
- CE & UKCA compliant to all relevant standards
- Designed and manufactured to ISO 9001 standard

### Overview

Verre Bell and Room Status Plate consists of a 'Doorbell' button and icons indicating the room status as 'Do not disturb' (DND) or 'Make Up Room' (MUR). Configure to order options include individual non illuminated room numbers.

This plate is complemented by a *Room Entrance Plate* which consists of 3 lighting scenes for use when entering or leaving a room as well as the ability to set the room status to DND or MUR.

These two user interfaces form part of the larger Verre Series, delivering a complete room comfort control solution.

Buttons feature 'back illumination' employing an RGB LED chip. Colour profiles allow for 'on/highlight' and 'off' colours to be set from a colour palette. Audio feedback can also be set if required. The intensity of the backlight can be automatically adjusted, allowing different settings for daytime, night-time or based on occupancy. The proximity sensor brightens up the plate to welcome an approaching user.


With a choice of black, white and grey plate finishes, and the flexibility afforded through RGB illuminated buttons, Verre Series provides a refined finish to compliment any interior design.




Bell and Room Status Plate with Doorbell, Make up room and Do not disturb notification




Room Entrance Plate with 3 lighting scenes and the ability to set room status to make up room or do not disturb on the Bell and Room Status Plate



Bell and room status plate set to - No Not Disturb



Bell and room status plate including room number




Bell and room status plate in Grey

## Button Functions

Doorbell  
Scene selection  
Scene raise/lower  
Channel raise/lower  
Toggle on/off  
Toggle raise/lower  
True off  
Task (start/stop a sequence)

## Dimensions

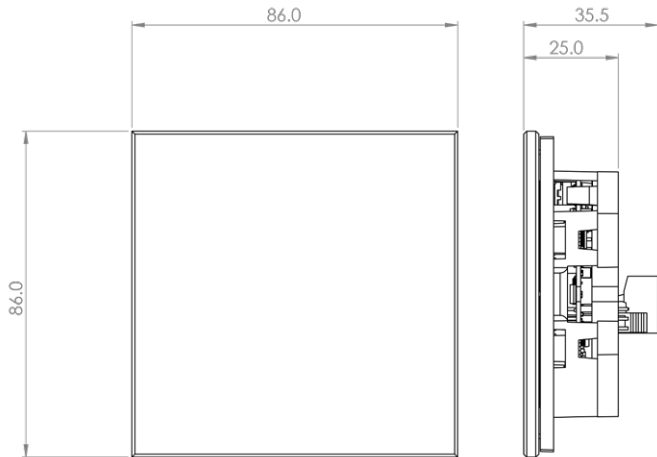


## Electrical Data

Supply: +15V (via iCANnet)  
iLight network cable size: 5 x 1mm<sup>2</sup>  
FLASH memory to be able to upgrade firmware  
EEPROM for program and sequence memory

## Mechanical Data

Control Cable Access: via standard 47mm deep UK wallbox – not provided  
Operating Temperature: +2°C to +50°C  
Humidity: +5 to 95% non condensing  
Control Inputs: One set of terminals for the iLight iCANnet network  
Weight: 100g

## Typical Schematic

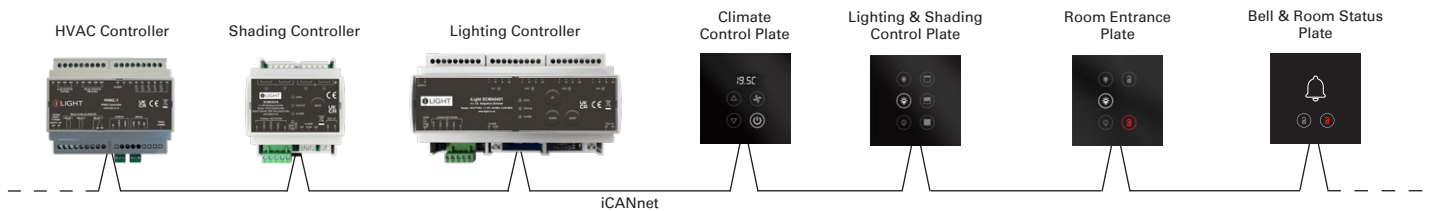

## Contact Us

[enquiries@iLight.co.uk](mailto:enquiries@iLight.co.uk)

[www.iLight.co.uk](http://www.iLight.co.uk)

**iLight**  
A brand of Signify  
Usk House, Llantarnam Park  
Cwmbran, NP44 3HD, UK

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

© 2024 Signify Holding  
All Rights Reserved

iLight is a registered trademark.  
All other trademarks are property of their respective owners.

Verre Guest Room Rev3 0524



FM 727924