

SCD Server Pro

Tracking backup event controller / Architectural system integration

Key Features

Tracking backup & Event Controller

- 19" Lighting Control System based upon the ZerOS operating system
- 4096 Control channels, fully patchable to 4 DMX Universes (DMX Output via 5 Pin XLR or via Ethernet)
- Cue Stack Sequence Playback
- Effects engine
- Colour, Beamshape, Position and Effect Palettes
- Integrated colour picker (CMY, RGB and HSV)
- Auto palettes, groups and macros
- 4x Onboard USB ports for software updates, show backups and connection of accessories
- XGA Monitor Output
- Onboard fixture library
- Support for remote control through handheld devices and remote monitors (iPhone, iPad, Android & Windows Mobile)
- DMX 512 Input
- 6 Channel Close Contact trigger
- MIDI & SMPTE Timecode
- Sound to Light Input
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2015 standards



Overview

SCD Server Pro 4096 channels

Can be used as:

- A stand alone or remotely controlled event replay controller for complex permanent installations such as facades, landscapes or theme parks.
- A fully tracking Backup to any ZerOS lighting console (FLX Range, Solution Range, ORB XF, Frog 2 and Leap Frog 48 & 96).
- A bridge between a performance lighting system and an architectural lighting control network making it ideal for theatres, conference centres and other public building applications.

A rackmounted, fully featured, lighting control system ideal for use in larger performance installations and networks where show replay, tracking backup or standalone operation is required.

Running on ZerOS - a powerful and proven lighting control application designed for the control of all types of performance lighting including LED, intelligent moving lights, media servers, effects and traditional theatrical lighting fixtures and dimmers.

SCD Server Pro features DMX input and capture along with interfaces to MIDI, ArtNet, streaming ACN and contact closures as well as acting as an iLight iCAN network device within a distributed intelligence architectural lighting network.


Ordering Information

0020-000002-01 SCD Server Pro

Supplied Accessories

Mains IEC Lead
Operating Manual

Dimensions

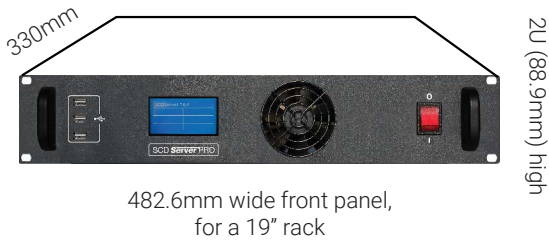

Weight: 6.0kg



Key Features

Architectural System Integration

- iCANnet™ inputs (Can-Bus) for system integration with control panels, touch screens or other iCAN network devices
- Simple patching of blocks of 128 Channels to iCAN areas
- DMX addressable per channel
- iCANnet™ supports multiple SCD Servers

Specifications

- Control channels: 2048 (Patchable to any DMX address) Ugradable to 4096
- Cues: 1000 stacks x 10,000 cues (Maximum 10,000 total cues)
- Supply voltage range: 100-240V, 47-63Hz
- 4 x DMX512-A opto isolated outputs via 2/4 x XLR 5 sockets, over-voltage protected
- ZerOS operating software
- Ethernet support protocols (RJ45 port, 100 Base T): Art-Net & sACN (upto 8 universes max)
- RDM ready
- LightConverse, Capture & WYSIWYG visualisation support
- iOS, Android and Windows Mobile remote
- Tracking Backup functionality
- DMX Input: 1x DMX512-A
- Sound to Light input: Stereo ¼" Jack socket. 100mV – 10V
- Monitor Output: 1 x XGA via standard 15 pin D connector
- USB: 4 ports for connection of accessories or for storage (3 at the front, and 1 at the rear)
- Data Storage: USB memory stick (included)
- Rear mounted control inputs: SMPTE, MIDI in/thru, CAN (iCAN), Remote (8-pin DIN) and Line in/out
- Operating Temperature Range: +5 to +40°C

Contact Us

+44 (0)1923 495495

enquiries@iLight.co.uk

www.iLight.co.uk

Cooper Lighting Solutions
20 Greenhill Crescent,
Watford Business Park,
Watford, Herts, WD18 8JA. UK

© 2020 Cooper Lighting Solutions
All Rights Reserved

SCD Server Pro Rev7 0520

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

iLight is a registered trademark.

All other trademarks are property of their respective owners.

