


FLT-DAC-DALI

DALI Digital to Analogue Converter

Key Features


- Built-in relay and 1-10V current sinking interface used to integrate individual or a group of dimmable 1-10V ballasts/drivers to iLight's DALI lighting control system.
- All DALI DAC's device settings (fade, scenes and groups) configured through the Fifth Light's Lighting Management software, eliminating the need for manual adjustments
- Automatic detection of the DALI Bus power loss with default to closed, i.e. on or 100% position.
- Available for Class 1 or Class 2 wiring configurations.
- Ultra low profile form factor designed to fit inside ballast compartment of most standard luminaires.
- Easily mountable to fixture housing through standard knockout using supplied 90° elbow and mounting clip.
- Powered by the DALI bus and only requires line in and line out connections. Neutral and earth connection not required.
- Robust DALI communication interface withstands accidental connection to power lines (up to 347V).

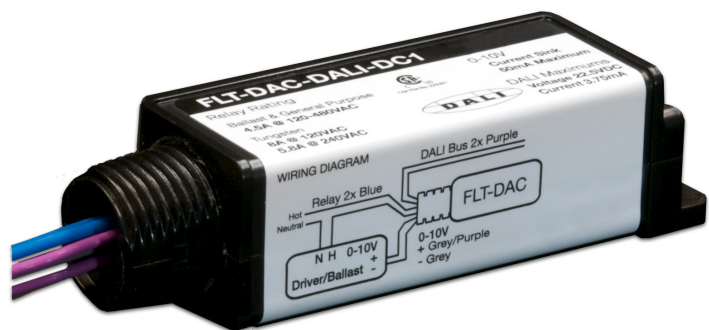

Overview

The DALI Digital to Analog Converter (DAC) is a lighting control device used to control any standard 1-10V current sourcing dimmable ballast/driver using Digital and Addressable Lighting Interface (DALI). It allows dimming control by converting DALI messages into 0-10V dimming signals and on/off control by leveraging the built-in relay.


Dimensions

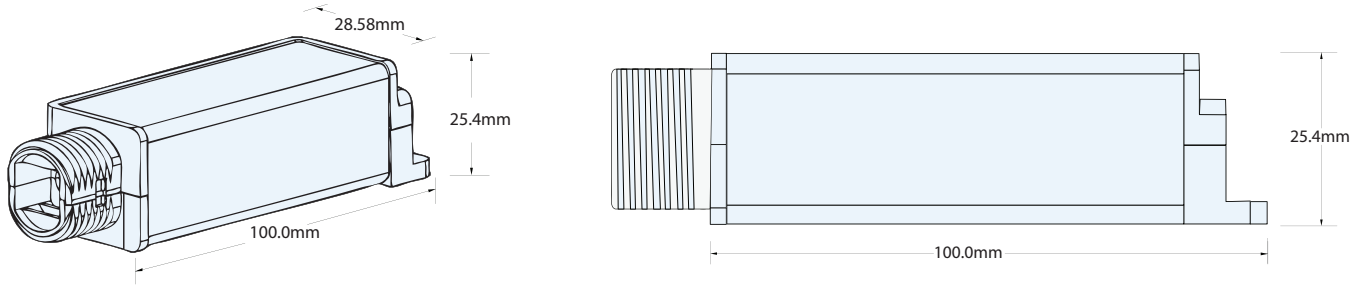

Technical Information

Enclosure	Dimensions: 25.4mm x 100mm x 28.6mm
Environment	Temperature: 0°C to 40°C Relative Humidity: 10% to 90% (non-condensing) For indoor use only
Relay Output Specifications	Input Voltage: 120-480 VAC +/-10% Maximum Ballast/General Load: 4.5A @ 120-480 VAC Maximum Tungsten Load: 8A @ 120 VAC, 5.8A @ 240 VAC Input Frequency: 50/60 Hz
Control Specification	Communication Interface: Digital Addressable Lighting Interface (DALI) and Analog Dimming DALI Current Draw: 3.75mA Analog Dimming Current Draw: 0-10 VDC, 50mA max current sink only
	<i>Note: Upon first power up allow 4-6 seconds before sending DALI command</i>
Wiring	Relay: 18 AWG solid TFN non-polarized pair 0-10V Dimming: 18 AWG solid TFN polarized pair DALI Communication: 18 AWG stranded PTFE plenum rated non-polarized pair
Mounting	In fixture or junction box mounting only.
Standards	Manufactured in an ISO 9001 certified factory

Typical Schematic

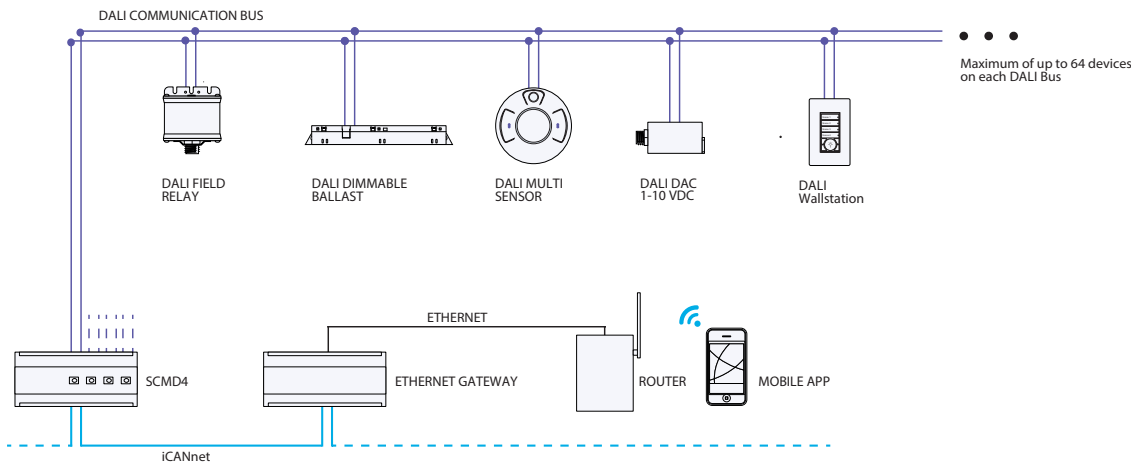

Contact your local Eaton office

20 Greenhill Crescent, Watford Business Park,
Watford, Herts, WD18 8JA. UK
T: +44 (0)1923 495496 F: +44 (0)1923 228796
E: enquiries@iLight.co.uk www.iLight.co.uk

Eaton Lighting Systems
20 Greenhill Crescent,
Watford Business Park,
Watford, Herts, WD18 8JA. UK
eatonlightingsystems.com

© 2017 Eaton
All Rights Reserved

FLT-DAC-DALI Rev2 1117

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.