



Sencia

Sencia Control Plate Range

Key Features

- Single and double column button configurations
- Available in small, medium or large buttons configurations
- Black buttons with white backlit text
- Custom button text and graphics available to order
- Choice of coloured inserts to change the illumination colour
- Available in Brushed Stainless Steel, White, Bright Chrome and Polished Brass as standard, other special finishes available to order
- All button functions are fully programmable for single actions or controlling sequences
- Hidden programming socket
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Configurable start up mode
- CE & UKCA compliant to all relevant standards
- Designed and manufactured to ISO 9001 standard



Overview

The Sencia range of control plates provide a combination of contemporary design with intuitive user control. They feature an array of button configurations in single or dual column. Each slim line button is LED backlit and can show a range of text and icon options to tailor each panel to a project specific requirement. A choice of coloured button inserts can be added to any button to change the illuminated colour to complete the look.

Sencia control panels are available in a variety of plate finishes to complement even the most ambitious interior designs. Panels can be installed in either standard single gang UK style electrical wall boxes or European round boxes* and can be installed in almost any location in the building on the iLight control system low voltage network.



Button Functions

- Scene selection
- Scene raise/lower
- Channel raise/lower
- Toggle on/off
- Toggle raise/lower
- True off
- Open/close (for curtains or blinds)
- Raise/lower (for motorized screens)
- Task (start/stop a sequence)

Mechanical Data

Control Cable Access:

Standard UK wallbox, 35mm deep minimum (not supplied).

Standard European backbox, 40mm deep minimum (not supplied)

Temperature: +2°C to +40°C

Humidity: +5 to 95% non condensing

Control Inputs:

One set of terminals for the iLight iCANnet™ network

*Optional 4mm gasket for use with European Back Boxes

Electrical Data

Supply: +12 - 18V DC (via iCANnet™ cable)

Terminal Sizes:

Recommended network cable:
Belden 1502 or equivalent

Memory:

FLASH memory to be able to upgrade firmware
EEPROM for program and sequence memory

Accessories


5620-000715-00 4mm (Depth) gasket for use with European back box

SGBB-F/S/P Standard UK back box
F - Flush mounted in metal.
Suitable for fixing in solid walls


S - Surface mounted white plastic.
Suitable surface mounting on any type of wall

P - Flush mounted in plastic.
Suitable for plasterboard walls


Dimensions

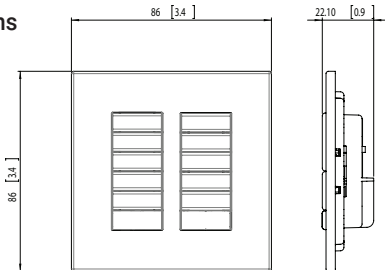


Standard Configurations



SSR-2LB-B



SSR-3MB-B




SSR-2LB-2LB-B




SRR-5SBRL-B



SSR-6SB-B




SSR-3MB-3MB-B



SRR-6SB-5SBRL-B



SRR-5SBRL-3MB-B



SRR-5SBRL-5SBRL-B



SRR-5SBRL-6SB-B



SRR-6SB-6SB-B

Ordering Codes



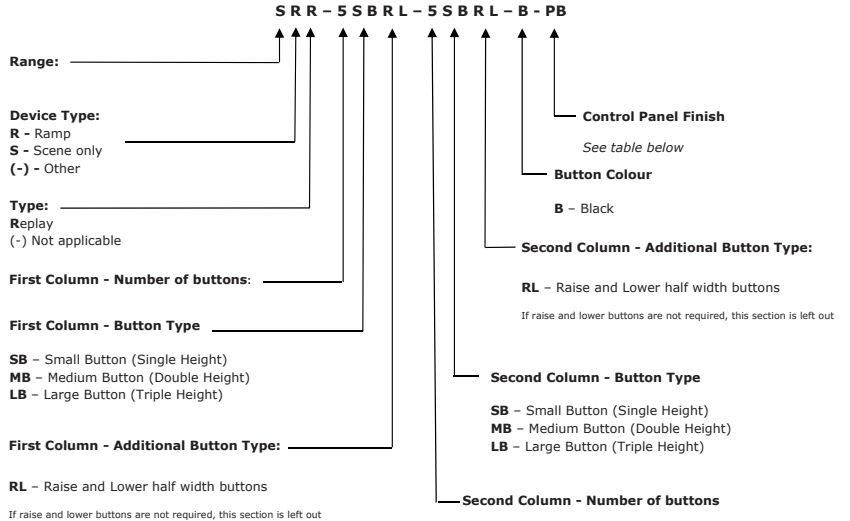


Plate Finish Codes



Typical Schematic

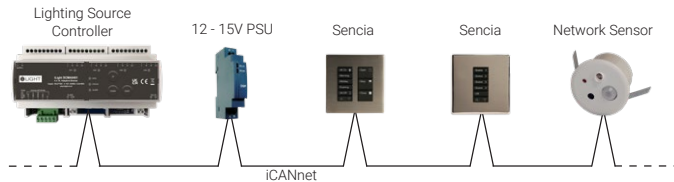

Contact Us

+44 (0)1923 495495

enquiries@iLight.co.uk

www.iLight.co.uk

iLight
A brand of Signify
Usk House, Llantarnam Park
Cwmbran, NP44 3HD, UK

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

© 2022 Signify Holding
All Rights Reserved

iLight is a registered trademark.
All other trademarks are property of their respective owners.

SENCIA Rev14 0422



FM 727924

