



# PPAD-C-HB-12-24V



## Ceiling mounted high bay presence/absence detector

### Key Features

- For connection to iCAN networks via UIM, UIG-2, UIS or DALI-U devices.
- PIR Sensor: Detects movement within the unit's detection range, allowing load control in response to changes in occupancy.
- Absence and override to on/off via switch input.
- Light Level Sensor: An integral adjustable photocell allows the lights to be kept off if there is sufficient ambient light.
- Switch input connector: Two input terminals can be used to manually override the lights on or off.
- Status LEDs.



### Achievable Energy Savings



### Code Compliance

- Improves BREEAM & LEED scoring for building sustainability.
- Contributes to energy reduction targets under Climate Change Levy (CCL) and Carbon Reduction Commitment (CRC).
- Qualifies for Enhanced Capital Allowance (ECA) applications.
- Delivers lighting control requirements under UK Building Regs - L2a & L2b and BRE: 498.

### Overview

The PPAD-C-HB-12-24V is a low voltage presence/absence high bay detector which provides automatic control of lighting, heating and ventilation loads when connected to the iCAN network\*.


The PPAD-C-HB-12-24V detects movement using a PIR (Passive Infra-Red) detector.

This unit can operate both in presence and absence mode as well as in response to a user defined daylight threshold level.

System timeout periods are adjusted in iCANsoft.

The PPAD-C-HB-12-24V may be powered from the iCAN network supply.

## Detection

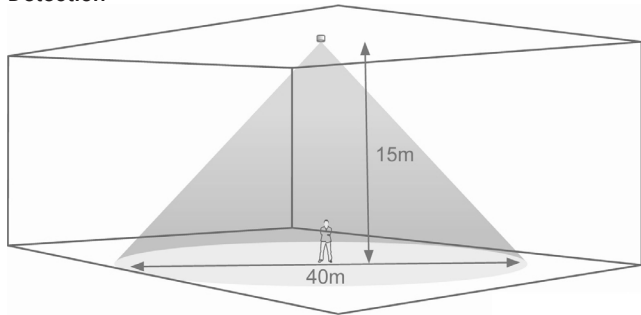

Ideal for Warehouse, storage aisle, industrial, atriums, high bay applications.

Maximum recommended mounting height: 15m

## Technical Specifications

Weight: 0.2kg complete unit

Supply Voltage: 12-24V via iCANnet network using UIS, UIG-2, UIM and DALI-I-U devices

Switched Output: Open collector transistor

Supply Current: 50mA (Additional power supply may be required depending on total network load).

Power consumption: On 640mW, Off 271mW

Terminal Capacity: 2.5mm<sup>2</sup>

Temperature: -10°C to 35°C

Humidity: 5 to 95% non-condensing

Material (casing): Flame retardant ABS and PC/ABS

Type: Class 2

IP rating: IP40 without gasket. IP65 with gasket fitted (supplied).

## Accessories

- SB-C: Surface Mounting Box
- SB-C-EX: Surface Mounting Box Extender
- SB-C-IP65: IP65 Rated Surface Mounting Box


## Remote Control Programmers (ordered separately)

- HHIR-PROG: Hand held IR programmer control.
- HHIR-LCD-PROG: Advanced hand held IR programmer with LCD display.

## Commissioning

PIR on/off time and threshold light level can be set via the hand held IR remote for commissioning.

\*This sensor is intended for use with UIS, UIG-2, UIM and DALI-I-U devices on iCAN networks. Additional network commissioning will be required.

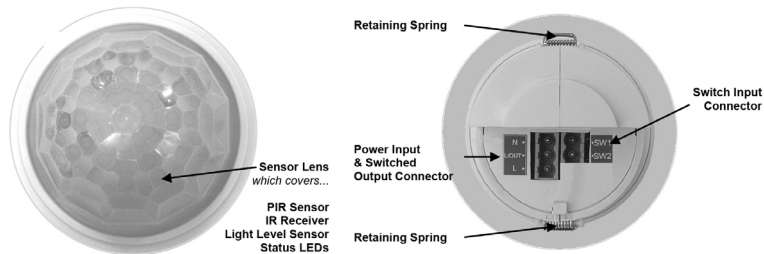

## Sensor functionality

### Detection Mode

The Detection Mode can be set to behave in Presence or Absence mode:

- Presence: When movement is detected the sensor will automatically activate. When the area is no longer occupied the sensor will automatically de-activate after an adjustable time period.
- Absence: The sensor is manually activated. When the area is no longer occupied the sensor will automatically deactivate after the adjustable time period has elapsed.


In either case, sensitivity to movement of the PIR sensor can be adjusted using the Sensitivity parameter.

HINT: To assist in setting the Sensitivity, turn on the Walk Test LED which will flash red when movement is detected.

### Switch Level On/Off

- Occupancy detection can be made dependent on the ambient light level using the Lux On Level and Lux Off Level parameters.

## Dimensions

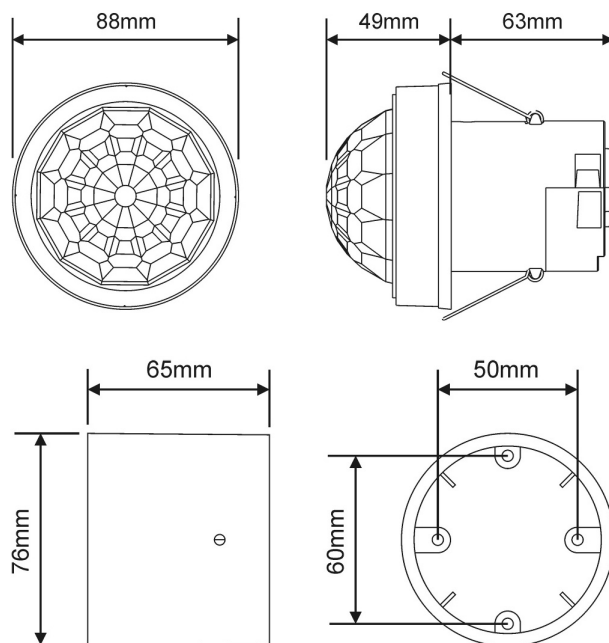

## Contact Us

+44 (0)1923 495495

enquiries@iLight.co.uk

www.iLight.co.uk

**Cooper Lighting Solutions**  
20 Greenhill Crescent,  
Watford Business Park,  
Watford, Herts, WD18 8JA. UK

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

iLight is a registered trademark.

All other trademarks are property of their respective owners.