



PSU-15-DIN10WC

15V - 10W Power supply unit for DIN rail mounting

Key Features

- Low 56mm Profile
- Wide Range AC input
- Full Power at 61°C
- Fits into wall mounted cabinets
- Global use with no input selector switches
- No derating needed

Dimensions

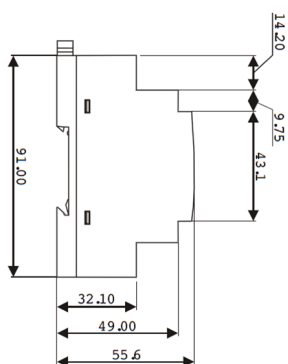

Overview

The PSU-15-DIN10WC is a DINrail mounted power supply with a single fixed output rating of 10W at 15V.

Electrical Data

AC Input Voltage range: 90 - 264VAC,
Class II double insulated

Input Frequency: 47 - 63Hz

DC Input Voltage range: 120 - 370VDC

Inrush Current (115 / 230VAC): 15 / 30A

Output Voltage Accuracy %: $\pm 1\%$ of Nominal

Overcurrent Protection (Typ): 110 - 160%,
fold forward under short circuit

Overvoltage Protection V: 120 - 145%

LED Indicators: Green LED = On, Red LED =
DC Output Low


Operating Temperature: -25 to +71°C

Operating Humidity: 20 to 95% RH
(non condensing)

Cooling: Convection

Immunity: EN61000-4-2, -3, -4, -5, -6, -8 & -11

Conducted & Radiated EMI: EN55022 class B

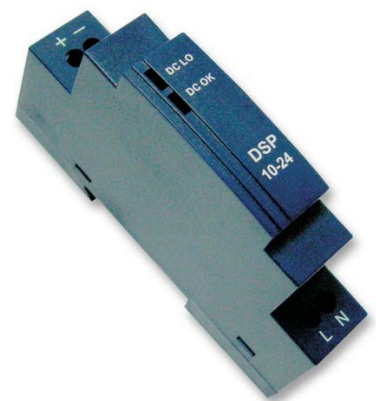

Contact Us

+44 (0)1923 495495

enquiries@iLight.co.uk

www.iLight.co.uk

Cooper Lighting Solutions
20 Greenhill Crescent,
Watford Business Park,
Watford, Herts, WD18 8JA. UK

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

iLight is a registered trademark.

All other trademarks are property of their respective owners.

© 2020 Cooper Lighting Solutions
All Rights Reserved

PSU-15-DIN10WC Rev5 0520