

# MTS6 & MTS12

## DALI Ceiling Sensor with PIR and Daylight Sensing

#### Key Features


- Daylight sensing & occupancy detection technologies combined into a single device
- All device settings (timers, sensitivity and groups) programmable through software, no physical adjustments needed
- Ultra low profile and small diameter provides an aesthetically pleasing design
- Draws power from the DALI communication bus to eliminate the need for external power packs
- Sharing sensor data with third party automation systems significantly reduces total bill of materials
- Robust communication interface withstands accidental connection to power lines (up to 347V)
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2015 standards.


#### Overview

The iLight DALI Multi-Sensor combines daylight sensing and occupancy detection into a single device. The Multi-Sensor communicates over the Digital Addressable Lighting Interface (DALI) and allows for all device settings and groups to be adjusted remotely.



#### Dimensions








#### **Technical Information**


Performance	Input Voltage: 9.5 - 22.5 VDC supplied by DALI communication bus
	<b>Coverage:</b> MTS6 = 55m <sup>2</sup> or MTS12 = 110m <sup>2</sup> at 2.4m ceiling height
	Occupancy Detection Technology: Passive Infrared (PIR)
	Lens Type: Multi-level Fresnel 360°
	Daylight Sensing Range: 0 to 400 lux
	Daylight Sensing Coverage: Light input within 60° cone
	Status Indicator: LED
	<b>Operating Environment:</b> 0°C to 40°C For indoor use only
	Dimensions: 91mm x 91mm x 36mm
Wiring & Mounting	DALI: 0.75mm <sup>2</sup> (18 AWG) stranded PTFE plenum rated non-polarized pair
	<b>Mounting:</b> 101.5mm (4") octagon junction box or 76mm (3") hole in ceiling tile
Control Specification	Communication Interface: Digital Addressable Lighting Interface (DALI)
	DALI Current Draw: 3.75mA
Standards	Manufactured in an ISO 9001:2015 certified factory

#### Detection

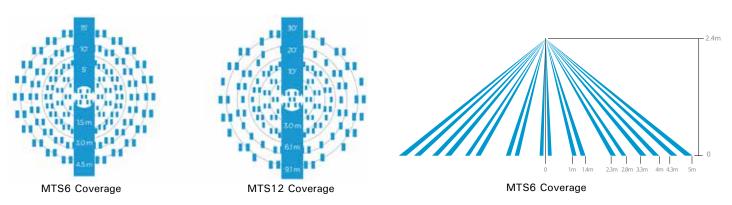

**Typical Schematic** 

Powering Business Worldwide

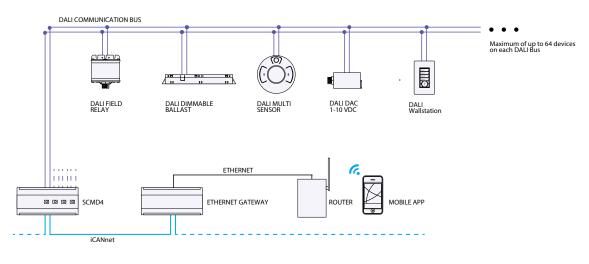

### **Contact your local Eaton office** F: +44 (0)1923 228796

T: +44 (0)1923 495495 E: enquiries@iLight.co.uk

Eaton Lighting Systems 20 Greenhill Crescent, Watford Business Park, Watford, Herts, WD18 8JA. UK eatonlightingsystems.com

© 2018 Eaton All Rights Reserved

MTS6 & MTS12 Rev5 1218

www.iLight.co.uk

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

